



The bridge to possible

Enterprise Use Cases for 6GHz

Mark Krischer


Principal Wireless Architect, Cisco Asia-Pacific, Japan and Greater China

18 February 2022



Immersive Experiences

Today...

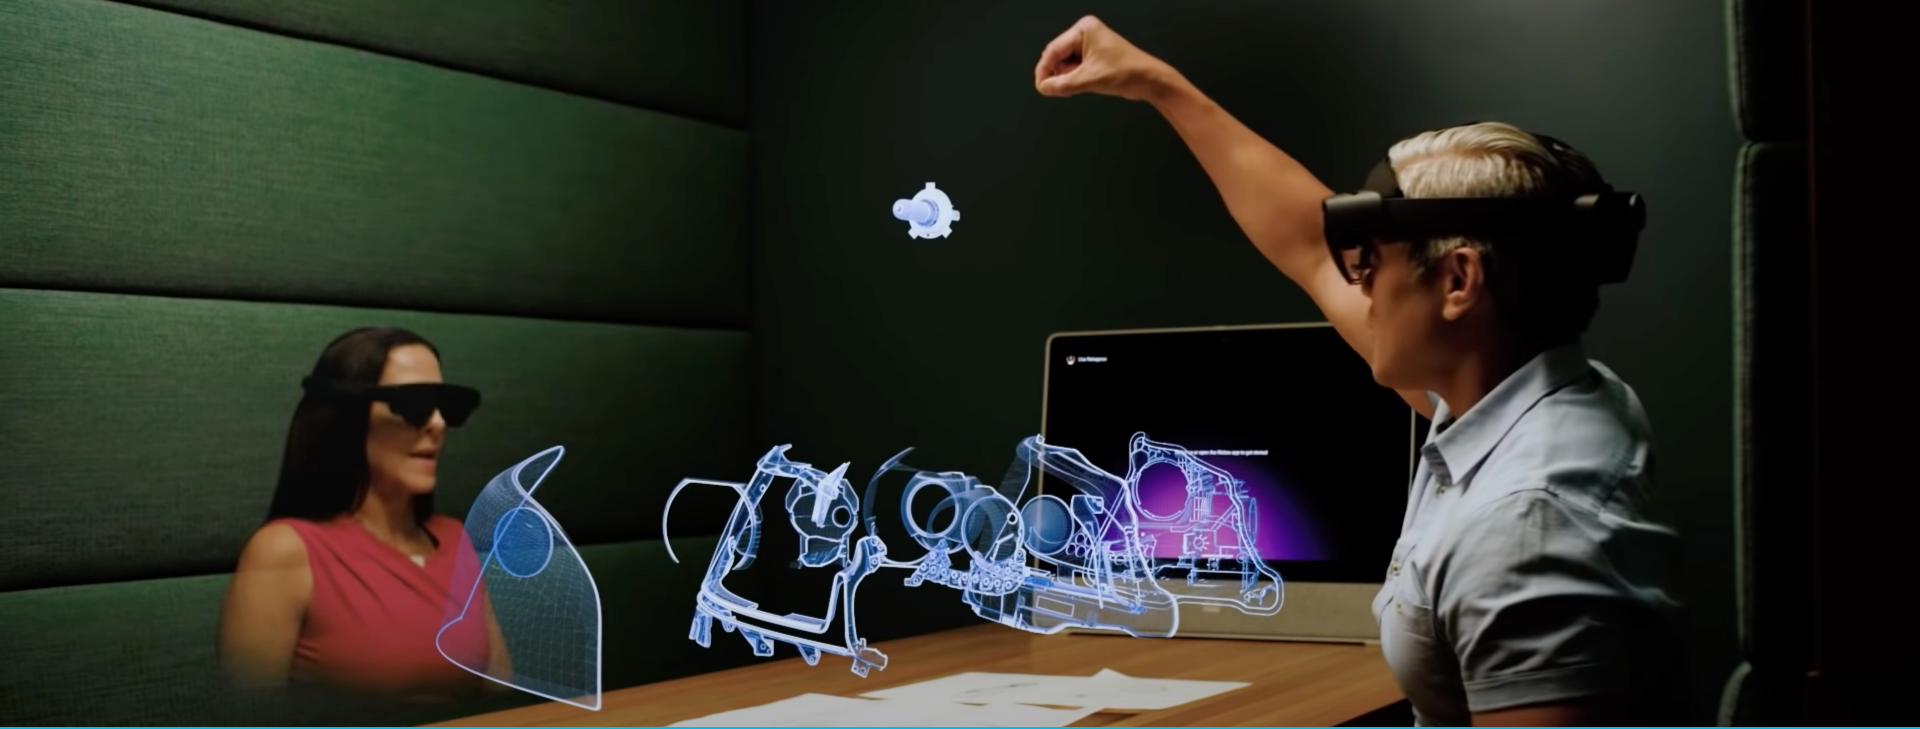


And Tomorrow...



The need for 1200MHz

- In the 5GHz band, 40MHz is the sweet spot for high density designs at a 12m spacing minimum
- A reduction of just 1m will lead to an unacceptable increase in co-channel interference

Area	1K ft ² / 93 m ²		1.2K ft ² / 111 m ²	1.5K ft ² / 130 m ²
BW	80 MHz	40 MHz	40 MHz	40 MHz
Pass/Fail	●	●	●	●

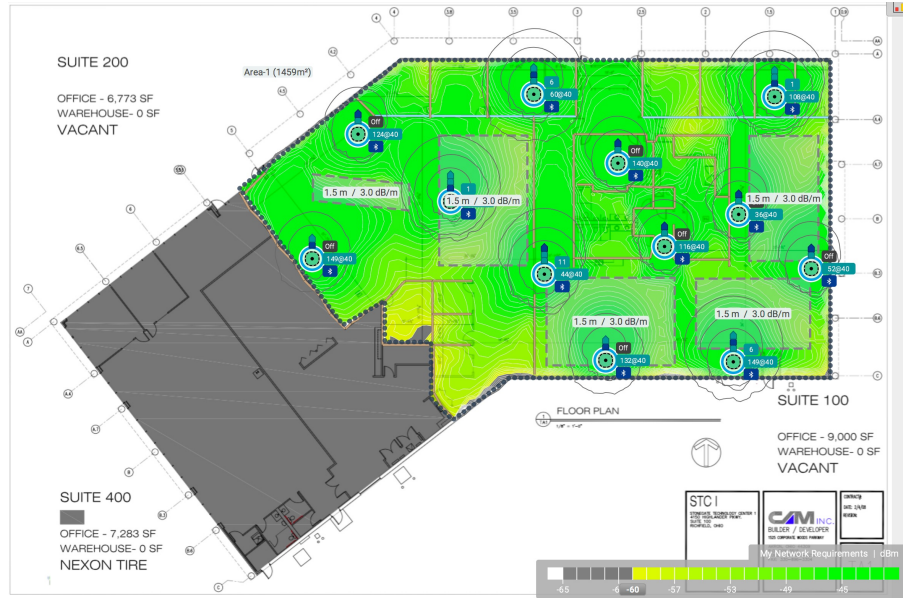



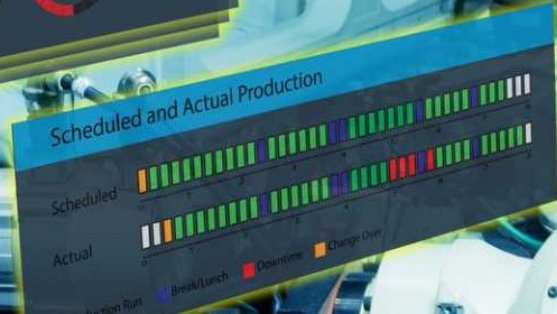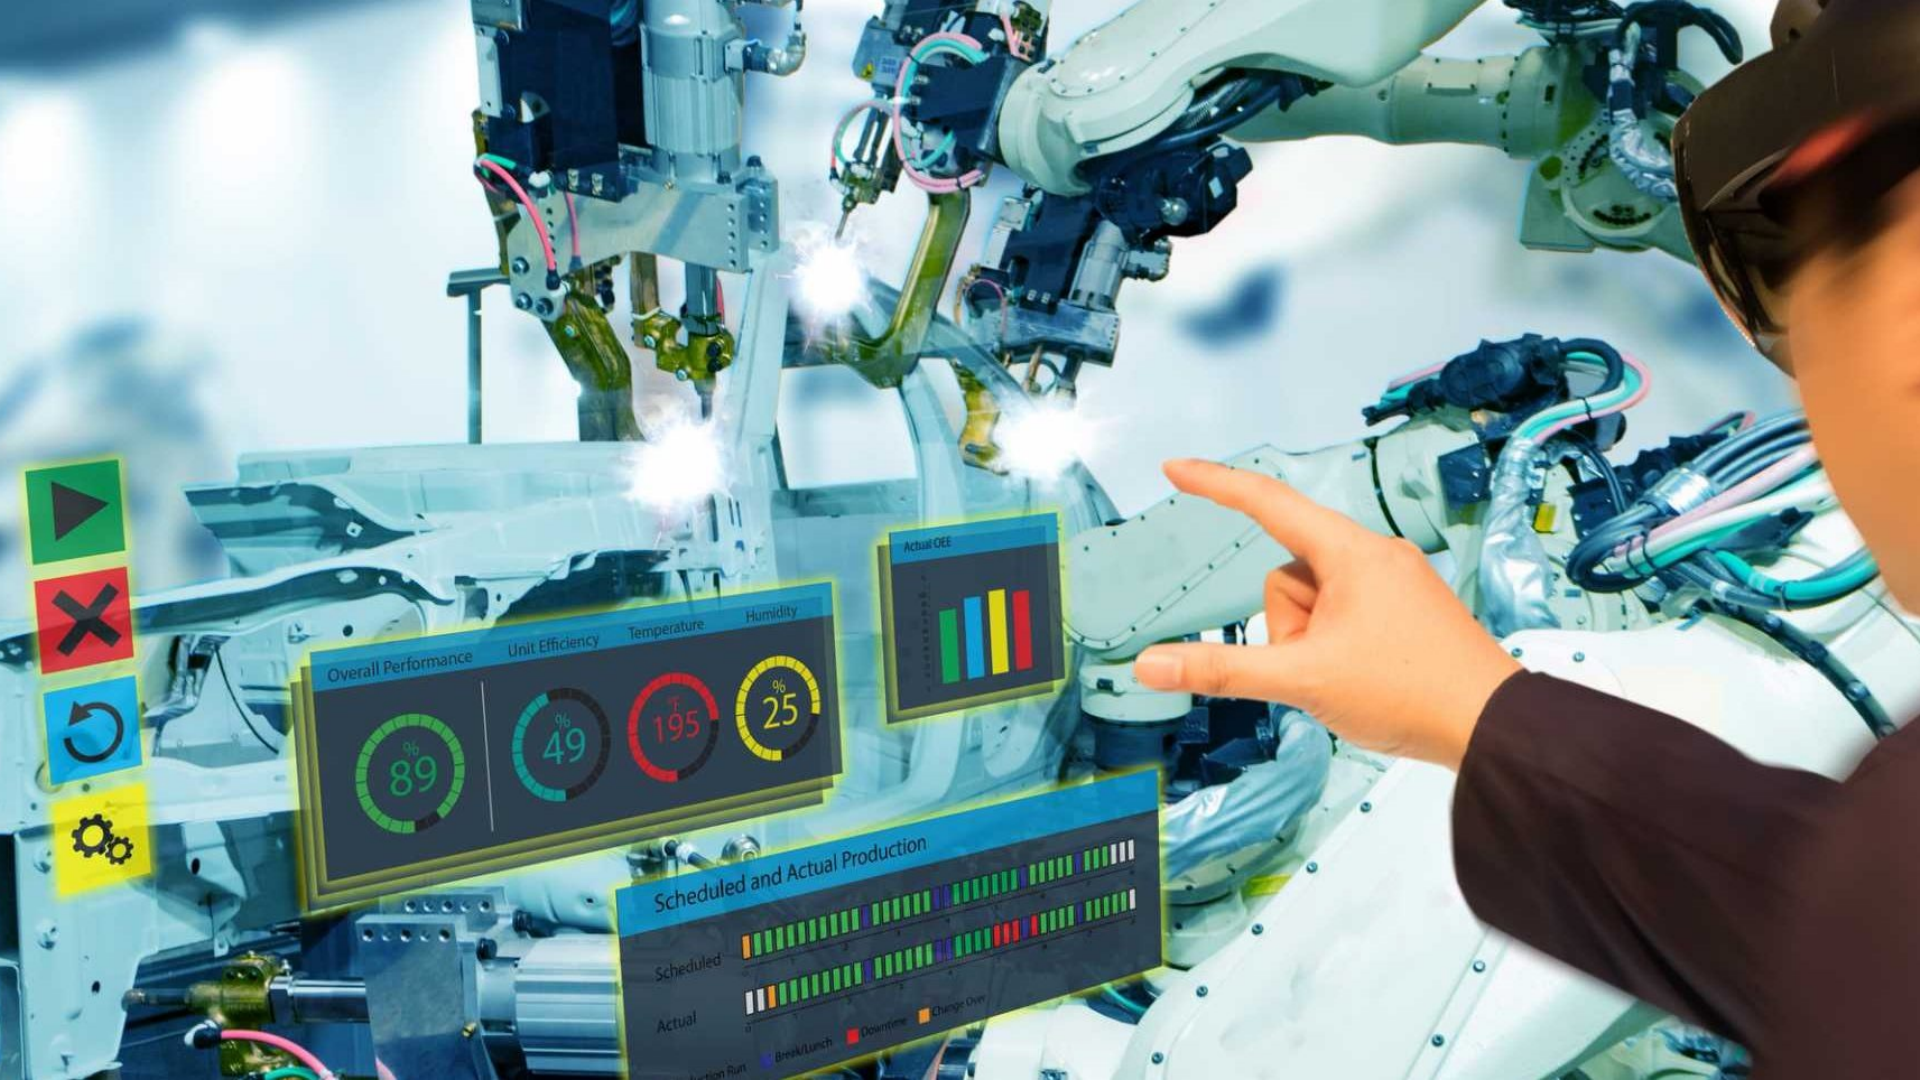





The bridge to possible